

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 November 2004 (25.11.2004)


PCT

(10) International Publication Number  
**WO 2004/101143 A1**

- (51) International Patent Classification<sup>7</sup>: B01J 20/30, B02C 17/00
- (21) International Application Number: PCT/PL2003/000115
- (22) International Filing Date: 4 November 2003 (04.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: P.360102 13 May 2003 (13.05.2003) PL
- (71) Applicant (for all designated States except US): EN-ERGOMAR - NORD Sp. z o.o. [PL/PL]; ul. Ksiecia Boleslawa 1/3, PL-01-452 Warszawa (PL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MASLANKA, Jacek [PL/PL]; ul. Strawczynska 12, PL-01-473 Warszawa (PL). PTASZEK, Bronislaw [PL/PL]; ul. Zwiazku Walki Mlodych 18/21, PL-02-786 Warszawa (PL).
- (74) Agent: KLAR, Miroslaw; ul. Bienackiego 1/29, PL-39-300 Mielec (PL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD OF AND DEVICE FOR OBTAINING HIGHLY REACTIVE CALCIUM SORBENTS AND/ OR OF BINDING MATERIALS

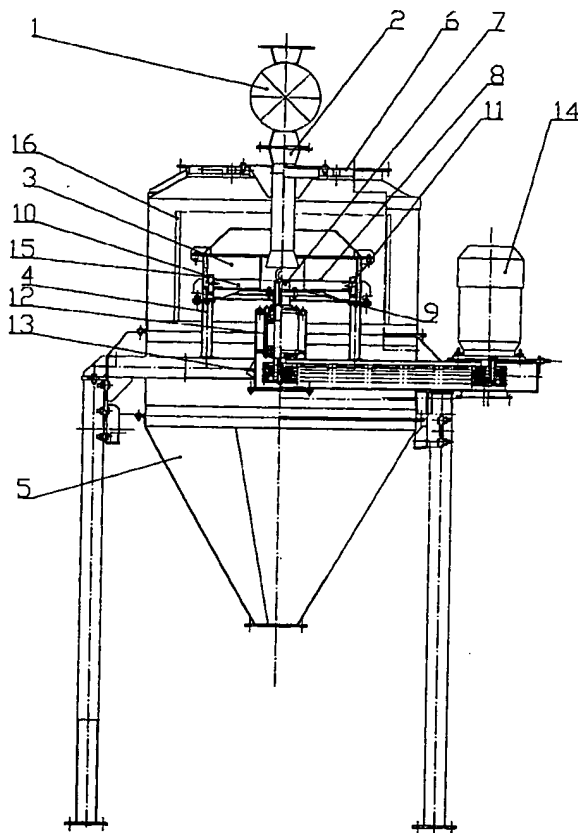

(57) Abstract: Subject of the invention is the method of and apparatus for fabrication of highly reactive calcium sorbents and/or binding materials, from powdered calcium carbonate and/or fly-ashes coming from coal combustion, especially in boilers with fluidised bed furnaces. Method according to invention is characterised in that the ashes with chemical by weight containing from 25% up to 45% SiO<sub>2</sub>, from 3% up to 25% Al<sub>2</sub>O<sub>3</sub>, from 10% up to 40% CaO, from 5% up to 15% SO<sub>3</sub>, beneficially with 51% addition of Portland cement or slag or clinker as activator, are beneficially pre-mixed with calcium carbonate and then the mixture or ashes are mechanically deagglomerated and activated through free particles collisions at the speed at least 8 m/sec. Device according to invention consisting of the container (5) closed with cover (6) and the chamber (3), characterised in that the ashes inlet pipe (2) is located centrally within the rotor (8) axis and finished with the tapered, expanding down outlet, whereas there is a group of arms (10), fastened radially to the disc (9) of rotor (8), equipped with blades (11), at the same moment every second blade (10) is positioned in the plane of rotor disc (8) and the others have a lift of 1° up to 2,5°, and there is a cylindrical basket (16) fastened between the outer cylindrical surface of the chamber (3) and cylindrical outer surface of the container (5), and electrically connected with the earth of container (5).



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

IC20 Rec'd PCT/PTO 10 NOV-2005

Method of and device for obtaining highly reactive calcium sorbents  
and/or of binding materials

The subject of invention is the method and the device for obtaining highly reactive calcium sorbents and/or binding materials, from de-agglomerated calcium carbonate and/or fly-ashes, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces.

The purpose of highly reactive calcium sorbents is to remove sulfur compounds from the hot exhaust gases, created during combustion of coal fuels, especially in boilers with fluidized bed furnaces, or in boilers with powdered-fuel burners, where the dry desulfurization is applied. Binding materials are assigned especially for usage in building industry.

There are known calcium sorbents for cleaning of exhaust gases, obtained by chemical modification. There are also known devices for obtaining sorbents by chemical modification.

There is known, from Polish description of patent application No P-345913, method for obtaining highly reactive calcium sorbents, characterized in that the de-agglomerated calcium sorbent with grain size below 150  $\mu\text{m}$  and at least 92% by weight content of  $\text{CaCO}_3$ , is mechanically de-agglomerated and activated through free particles collisions at the speed min 8 m/sec.

Method variation for obtaining the highly reactive calcium sorbents, from de-agglomerated calcium carbonate and/or fly-ashes, characterized in that to de-agglomerated calcium carbonate with grain size below 150  $\mu\text{m}$ , beneficially to 30  $\mu\text{m}$  and  $\text{CaCO}_3$  content min 92% by weight, fly-ashes are added from combustion of coal fuels, especially in in boilers with fluidized bed furnaces or boilers equipped with powdered-fuel burners, where dry desulfurization of exhaust gases is used, which contain by weight 4% up to 40% of  $\text{CaO}$ , from 25% up to 45%

SiO<sub>2</sub>, from 3% up to 37% Al<sub>2</sub>O<sub>3</sub>, and where content of calcium carbonate in the mixture with fly-ashes is 20÷60% by weight, beneficially 40% by weight, and so prepared mixture of calcium carbonate and fly-ashes is being mechanically de-agglomerated and activated, through free particles collisions at the speed at least 8 m/sec.

The next method variation for obtaining the highly reactive calcium sorbents from de-agglomerated calcium carbonate and/or fly-ashes is characterized in that the fly-ashes coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces and equipped with powdered-fuel burners, where the dry desulfurization of exhaust gases is being used, which contain by weight 4% up to 40% CaO, from 25% up to 45% SiO<sub>2</sub>, from 3% up to 37% Al<sub>2</sub>O<sub>3</sub> are being mechanically de-agglomerated and activated through free particles collisions at the speed at least 8 m/sec.

There is known, from the patent description No 134 580, the activated cement-ash binding material, which contains cement and fly-ashes from hard coal, in weight proportion 1:1,2 to 1:0,8 and from 0,015 up to 0,025 weight parts of chemical activator consisting of mixture of strong iron and sodium salts, beneficially mixture of sodium chloride, sodium sulfate, iron sulfate and/or copperas. The binding material is being mechanically and chemically activated through milling with chemical activator until the appropriate surface is obtained.

There is known, from the description of international application PCT No WO 9933762, the grout for injection, incorporating the fly-ashes. The compound, according to application includes: water, hydraulic binding material as cement and at least 100 kg/m<sup>3</sup> of fly-ashes coming from combustion of coal in fluidized bed furnace.

There is also known, from the Polish patent description No 180 380, device characterized in that the cylindrical part of container is finished with the cover, covered from inside with the dielectric material. In the cylindrical part of container there is the cylindrical process chamber, supported by brackets. The chamber has a conic cover, open at the top and having inside, at bottom a ring, around his perimeter. The chamber has in the upper part a ring, with holes placed around the prime-

ter, and in the lower part has a bottom equipped with a central hole and a series of circumferential holes. The chamber is also equipped with the inlet pipe, connected to the feeder, finished at the bottom with the disc and rotor which comprises a disc with radial blades, which have beaters on the ends, and the disc is coupled to the shaft, rotary mounted in the vertical axle of container. In the chamber bottom and in the holes of the chamber, ring beating rods are fastened. Between the inside container wall and outsider chamber wall, steel bands are hanging down, placed on the brackets around the chamber.

Method of obtaining highly reactive calcium sorbents, according to invention, based on mechanical de-agglomeration and activation, through free collisions of particles, at the speed at least 8 m/sec, of the mixture containing 20÷60% by weight, beneficially 40% of de-agglomerated calcium carbonate, with grain size below 150  $\mu\text{m}$  and content at least 92% by weight of pure  $\text{CaCO}_3$  with fly-ashes, coming from the combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuel burners, where the dry desulfurization is used, characterized in that calcium carbonate is being pre-mixed with fly-ashes containing by weight 25% up to 45% of  $\text{SiO}_2$ , from 3% to 25% of  $\text{Al}_2\text{O}_3$ , from 10% to 40%  $\text{CaO}$ , from 5% to 15%  $\text{SO}_3$ , and then the mixture is mechanically de-agglomerated and activated.

In the second variation of invention for obtaining the highly reactive calcium sorbents, through mechanical de-agglomeration and activation through free collisions of particles at the speed at least 8 m/sec, of fly-ashes, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuels burners, where the dry desulfurization is used, characterized in that fly-ashes containing by weight from 25% to 45% of  $\text{SiO}_2$ , from 3% to 25%  $\text{Al}_2\text{O}_3$ , from 10% to 40%  $\text{CaO}$ , from 5% to 15%  $\text{SO}_3$  are mechanically de-agglomerated and activated.

In the third variation of invention, method of obtaining materials from fly-ashes, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuel burners, where the dry desulfurization is used, through mechanical de-agglomeration and activation by free particles

collisions, at the speed at least 8 m/sec, characterized in that ashes containing by weight from 25% to 45% of  $\text{SiO}_2$ , from 3% to 25%  $\text{Al}_2\text{O}_3$ , from 10% to 40%  $\text{CaO}$ , from 5% to 15%  $\text{SO}_3$ , beneficially with addition up to 51% of activator, are being mechanically de-agglomerated and activated. As activator, the Portland cement or the slag, or linker, or the mixture 0,1 to 51% by weight, beneficially 5 to 20%, is used.

Calcium carbonate and/or fly-ashes are, according to invention method, mechanically activated, result of which is the increase of specific surface of the activated material. Beside the increase of specific surface, surfaces with adsorbed contaminations are cleaned and made able to react with intentionally introduced compounds. Thanks to this, the usage of sorbent surface is more efficient.

During the mechanical activation, there can be in grains local stress irregularities, caused for example by irregular shape and size of material being activated. This situation can lead to creation of new micro-cracks, dislocations, different types of lattice defects, and also propagation of existing cracks, thus boosting the de-agglomeration process. Shape and size irregularities of material being mechanically activated may also lead to creation of local stress irregularities. In mechanism of mechanical activation very important are different kinds of contaminations, which support the de-agglomeration process.

By introduction of fly-ashes to calcium carbonate and activation of such mixture, cleaning of existing surfaces and creation of new ones, through friction, are intensified. This is because the fly-ashes include silica compounds, characterized by high hardness, which for  $\text{SiO}_2$  is  $k = 7$ . Silica plays then, in mechanical activation, the role of grinding medium.

During process of mechanical activation of the calcium carbonate and fly-ashes mixture, particles of fine-grained calcium carbonate may deposit on fly-ashes grains, thus counter-acting to creation of agglomerates and may create much more reactive calcium-silica compounds.

Method according to invention allows for management of big quantities of waste, which is very fine-grained calcium carbonate (below 150  $\mu\text{m}$ ). Moreover the possibility to mix, according to invention method, very fine-grained calcium

carbonate with fly-ashes and mechanically activate this mixture, as well as mechanical activation of fly-ashes, allows for enlarging the scale of waste disposal, what is very significant from the environment protection point of view.

Device for obtaining the highly reactive calcium sorbents, according to invention, consisting of the container with cover, which has a dielectric layer inside, of the chamber closed with an open cone, with flat bottom, with central hole, where the shaft passes through, having a rotor with radial arms fastened to it, and bearings of the shaft and rotor drive are covered with dustproof housing, and inside the chamber there is a grid of rods, characterized in that the ashes inlet pipe located centrally, in the axis of the rotor, has a tapered, expanding to the bottom outlet. To rotor disc, set of arms is fastened, which have angle blades, and every second arm is in the plane of rotor disc, whereas the others have a  $1^{\circ}$  to  $2,5^{\circ}$  rise. Between the outer cylindrical surface of chamber and inside, cylindrical surface of container there is a cylindrical basket, electrically connected to the body of container.

Rotor of the device, according to invention, gives necessary energy to dense aerosol of activated through free collisions particles and causes creation of lattice defects in multi layers sorbents structure as well as spheroidizing of ash particles. As result of activation, on the surface of defected particles, static charge are emerging, and cause separation of activated and non-activated material, thus high effectivity of activation process and high quality of activated material are achieved.

Device, according to invention, is characterized by high output and efficiency. Because the chamber is open at the top, activated sorbent particles are removed and device reliability is increased. Process rods and rotor blades do not have excessive wear, because they are made from abrasion resisting materials. Dielectric inside layer of the cover makes settling of calcium sorbents particles, with excessive static charge and falling back into chamber, impossible. Rotor blades assure proper transportation of calcium carbonate and/or fly-ashes to the chamber and eliminate the possibility of throwing the material from chamber out, through the central hole in the bottom, before de-agglomeration and activation process of calcium sorbent take place.

Mechanical activation taking place in the device, according to invention, is a physical process, which does not require chemical reagents, labourous and expensive researches, concerning their long lasting influence on the sorbent.

Device according to invention allows for obtaining cheap, highly efficient calcium sorbents, which assure high, from environment protection point of view, effectivity of desulfurization of exhaust gases, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces, where the dry desulfurization of exhaust gases is used.

The subject of invention is presented as execution example on the drawing, where Fig. 1 shows the device in partial longitudinal cross-section, Fig. 2 – the increased detail from Fig. 1, including half cross-section of the chamber, Fig. 3 – top view of the device, with part of the rotor, blades fastened for the case of CW rotation.

The device consists of the feeder 1, metering the material being activated, inlet pipe 2 for ashes and the process chamber 3, supported by brackets 4. The container 5 is closed with cover 6, with inside dielectric layer. The process chamber 3 is covered at the top with an opened cone, and down closed with a flat bottom, with the central hole, where the shaft 7 passes through, with rotor 8 fastened to it. To the disc 9 of rotor 8, arms 10 are radially fastened, and on their ends angle blades 11 are located. Bearings 12 of rotor 8 are closed in the dust-proof housing 13, which protects also his drive connected to electric motor 14. Inside the process chamber there is a grid of rods 15. The cylindrical basket 16 intensifying the segregation of material being activated, is fixed in the space between processing chamber and container.

The charge in form of calcium carbonate and/or fly-ashes, coming from combustion of coal, especially in boilers with fluidized bed furnaces or boilers equipped with powdered fuel burners, where the dry desulfurization is used, is being introduced with metering feeder 1 through the inlet pipe 2 on the rotating with specified speed rotor 8. Particles of ashes are being transported with arms 10 of rotor 8 on angle blades 11 and thrown as dense aerazol in direction of rods 15, colliding with them at the speed at least 8 m/sec. Result of the collisions are lattice



defects in multi-layer envelope of particles, micro-cracks, dislocations. Big particles of ash are de-agglomerated, there is also spheroidizing of ash particles, because of internal friction in dense aerosol. As result of activation, static charges are emerging on the surface of defected particles, causing separation of activated and non-activated material. Because of electrostatic repulsion, particles are leaving the process chamber 3 and settling on walls of container 5 and basket 16, where the excessive static charge is discharged and particles are slipping down into conic part of container 5. The accumulated, in conic part, active calcium sorbent shows sorbent properties, used by cleaning of exhaust gases from sulfur oxides, coming from combustion of coal fuels in boilers with fluidized bed furnaces, boilers equipped with powdered fuel burners, where the dry desulfurization is used.

Below an example for obtaining calcium sorbent according to invention is presented. Sorbent reactivity grade has been established on the base of reactivity indicator Ri.

Example I:

Kontent of ashes from boiler with fluidized bed furnace:

SiO <sub>2</sub>	39% by weight
Al <sub>2</sub> O <sub>3</sub>	21% by weight
CaO	15% by weight
SO <sub>3</sub>	10% by weight

Other chemical compounds 15% by weight.

To ashes, as shown above, 40% by weight of calcium carbonate, coming from milling in Elektrownia Turów, has been added, containing 95,6 % CaCO<sub>3</sub> by weight, and having grain size below 150 µm, and mixture has been introduced to device according to invention, and then mechanically de-agglomerated and activated through free collisions of calcium carbonate particles, at the speed at least 8 m/sec.

As result of mechanical activation in device according to invention, calcium sorbent has been obtained, with reactivity indicator RI = 1,86, what places it in the class of high quality sorbents (RI <2,5).

Thanks to method and device for obtaining highly reactive calcium sorbents by mechanical activation of fine grained calcium carbonate, mixtures of ashes and

carbonates and also fly-ashes, cheap calcium sorbents of high reactivity indicators RI, placed in the best class sorbents with indicator below 2,5 are obtained. The best reactivity indicators of these sorbents, depending on calcium carbonate weight in weight concentration, have reactivity indicator below 2,0. Optimum results are especially obtained for calcium sorbent with weight in weight concentration 40% of calcium carbonate in the mixture of: fly-ashes and calcium carbonate. Reactivity indicator of this calcium sorbent is  $RI = 1,86$ .

Below an example of binding material obtained by invention method.

Example 2:

Content of ashes from boiler with fluidized bed furnace:

SiO <sub>2</sub>	39,80 % by weight
Al <sub>2</sub> O <sub>3</sub>	21,10 % by weight
CaO	15,14 % by weight
SO <sub>3</sub>	7,96 % by weight
Other chemical compounds	16,00 % by weight

To ashes as above, Portland cement CEMI 32,5 in proportion 9:1 has been added and the mixture has been introduced to device, according to invention, where the particles have been mechanically de-agglomerated and activated through free collisions at the speed 8 m/sec. As result of this process, homogeneous product with particles of regular shape and excessive static charge has been obtained. Product has binding features and after mixing with water in proportion 0,32 until plastic is obtained and keeping in normal conditions for 28 days, it has the following parameters:

- compression strength - 34,00 MPa
- bending strength - 7,50 MPa
- density - 1810 kg/m<sup>3</sup>
- dilatation -  $\pm 0,03$  %

### Claims

1. Method for obtaining highly reactive calcium sorbents from fine grained calcium carbonate and/or fly-ashes, through mechanical de-agglomeration and activation by free particles collisions at the speed at least 8 m/sec., of the mixture containing 20÷60% by weight, beneficially 40% of fine grained calcium carbonate with grain size below 150  $\mu\text{m}$  and content at least 92% by weight of pure  $\text{CaCO}_3$  with fly-ashes, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuel burners, where the dry desulfurization of exhaust gases is used, characterized in that calcium carbonate is being preliminary mixed with ashes containing by weight from 25% to 45% of  $\text{SiO}_2$ , from 3% to 25% of  $\text{Al}_2\text{O}_3$ , from 10% to 40% of  $\text{CaO}$ , from 5% to 15% of  $\text{SO}_3$ , and then the mixture is being mechanically de-agglomerated and activated.

2. Method for obtaining the highly reactive calcium sorbents, from fine grained calcium carbonate and/or fly-ashes, through mechanical de-agglomeration and activation by free collisions of particles at the speed at least 8 m/sec of fly-ashes, coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuel burners, where the dry desulfurization of exhaust gases is used, characterized in that ashes containing by weight 25% to 45% of  $\text{SiO}_2$ , from 3% to 25% of  $\text{Al}_2\text{O}_3$ , from 10% to 40% of  $\text{CaO}$ , from 5% to 15% of  $\text{SO}_3$  are mechanically de-agglomerated and activated.

3. Method for obtaining binding materials, from fly-ashes coming from combustion of coal fuels, especially in boilers with fluidized bed furnaces or equipped with powdered fuel burners, where the dry desulfurization of exhaust gases is used, based on mechanical de-agglomeration and activation through free particles collisions at the speed at least 8 m/sec, characterized in that ashes containing by weight from 25% to 45% of  $\text{SiO}_2$ , from 3% to 25% of  $\text{Al}_2\text{O}_3$ , from 10% to 40%  $\text{CaO}$ , from 5% to 15%  $\text{SO}_3$ , beneficially with addition 51% of activator, are being mechanically de-agglomerated and activated.

- 10 -

4. Method for manufacturing the binding materials, according to Claim 3, characterized in that as activator the Portland cement or slag, or linker, or their compositions 1 to 51% by weight are used, beneficially 5 to 20% by weight.

5. Device for manufacturing highly reactive calcium sorbents and/or binding materials, consisting of a container closed with cover, which has inside a dielectric layer, of a process chamber, closed with an open cone and a flat bottom, with the central hole, where the shaft with rotor fastened to it, passes through, and disc of rotor has radially fastened arms, bearings of rotor and his drive are covered by dust-proof housing, whereas inside of process chamber there is a grid of rods, characterized in that centrally located in axis of rotor (8) the ashes inlet pipe (2) has a tapered, expanding to bottom outlet, and to the disc (9) of rotor (8) set of arms (10) equipped with angle blades (11), is radially fastened, and every second arm (10) is in the plane of rotor disc (8), the others have a rise from 1° to 2,5°, and between outer, cylindrical surface of process chamber (3) and cylindrical, inside surface of container (5) there is fastened cylindrical basket (16), electrically connected to the body of container (5).

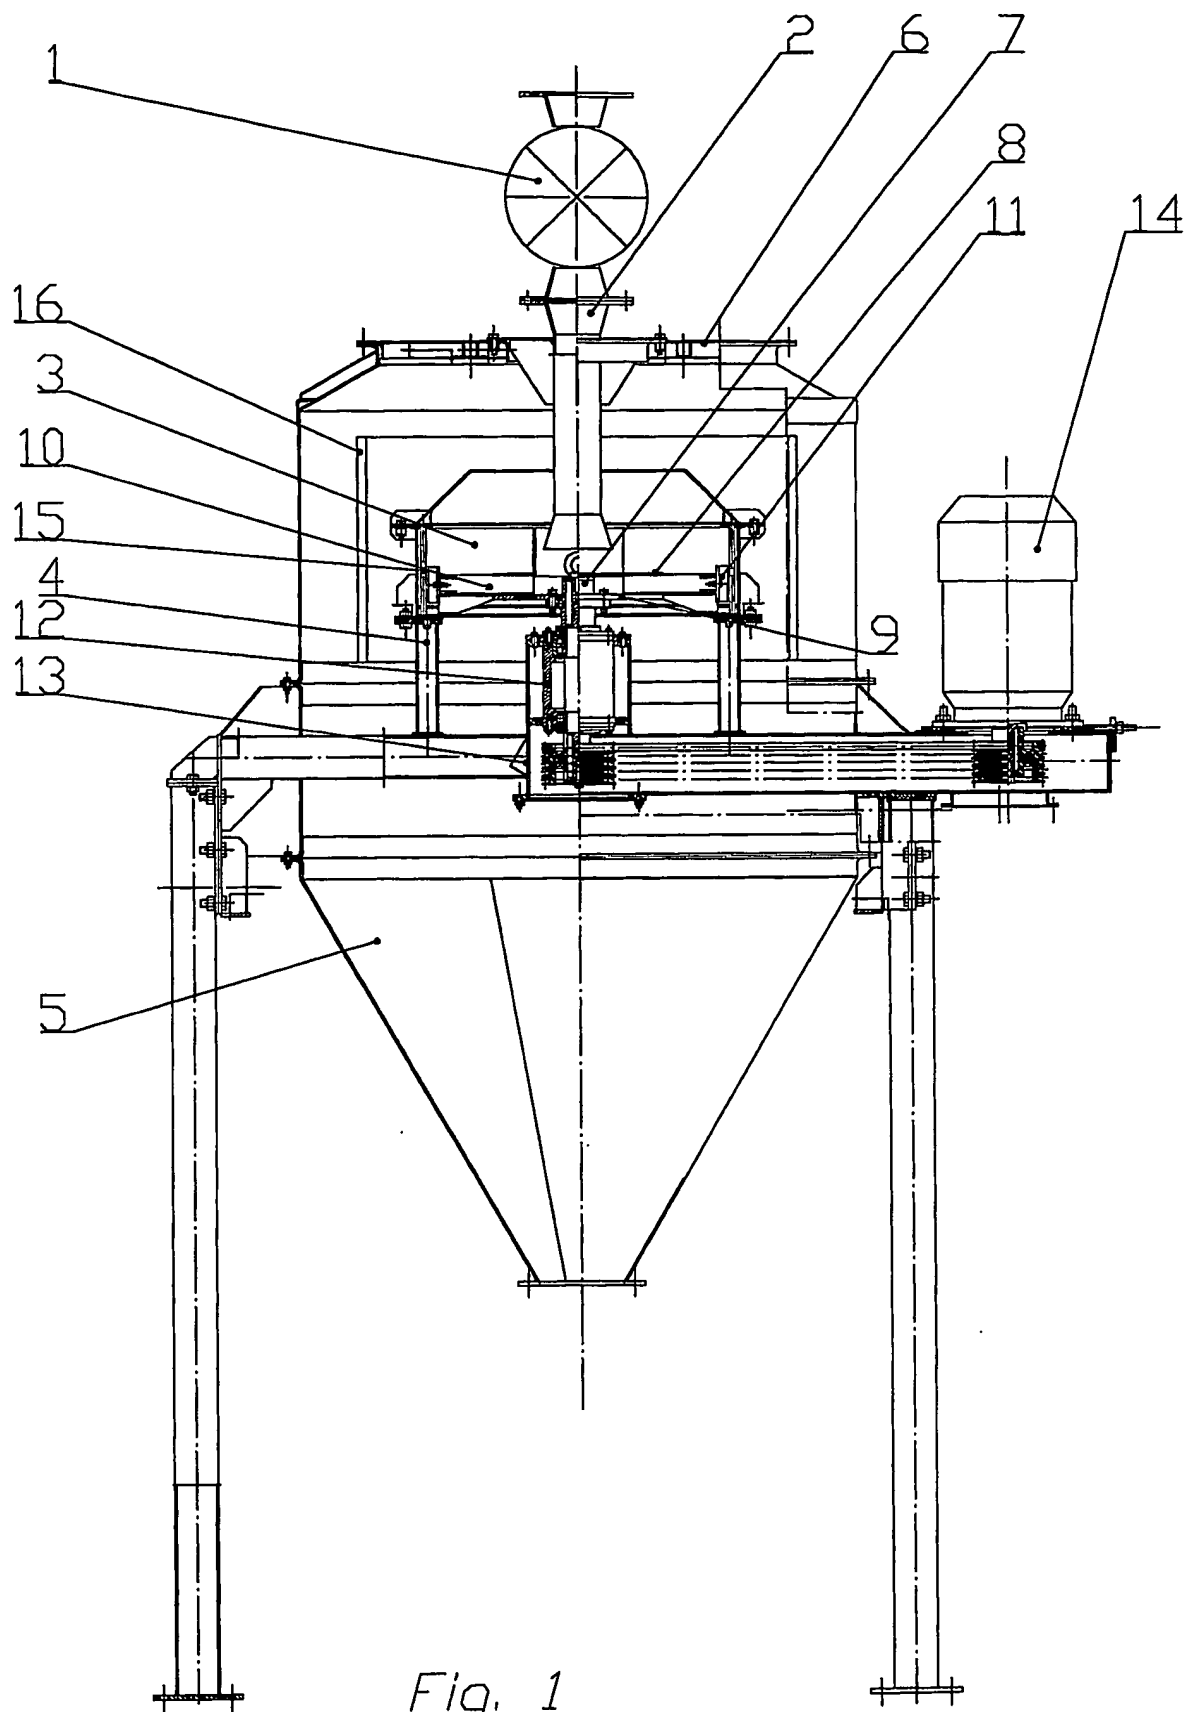


Fig. 1

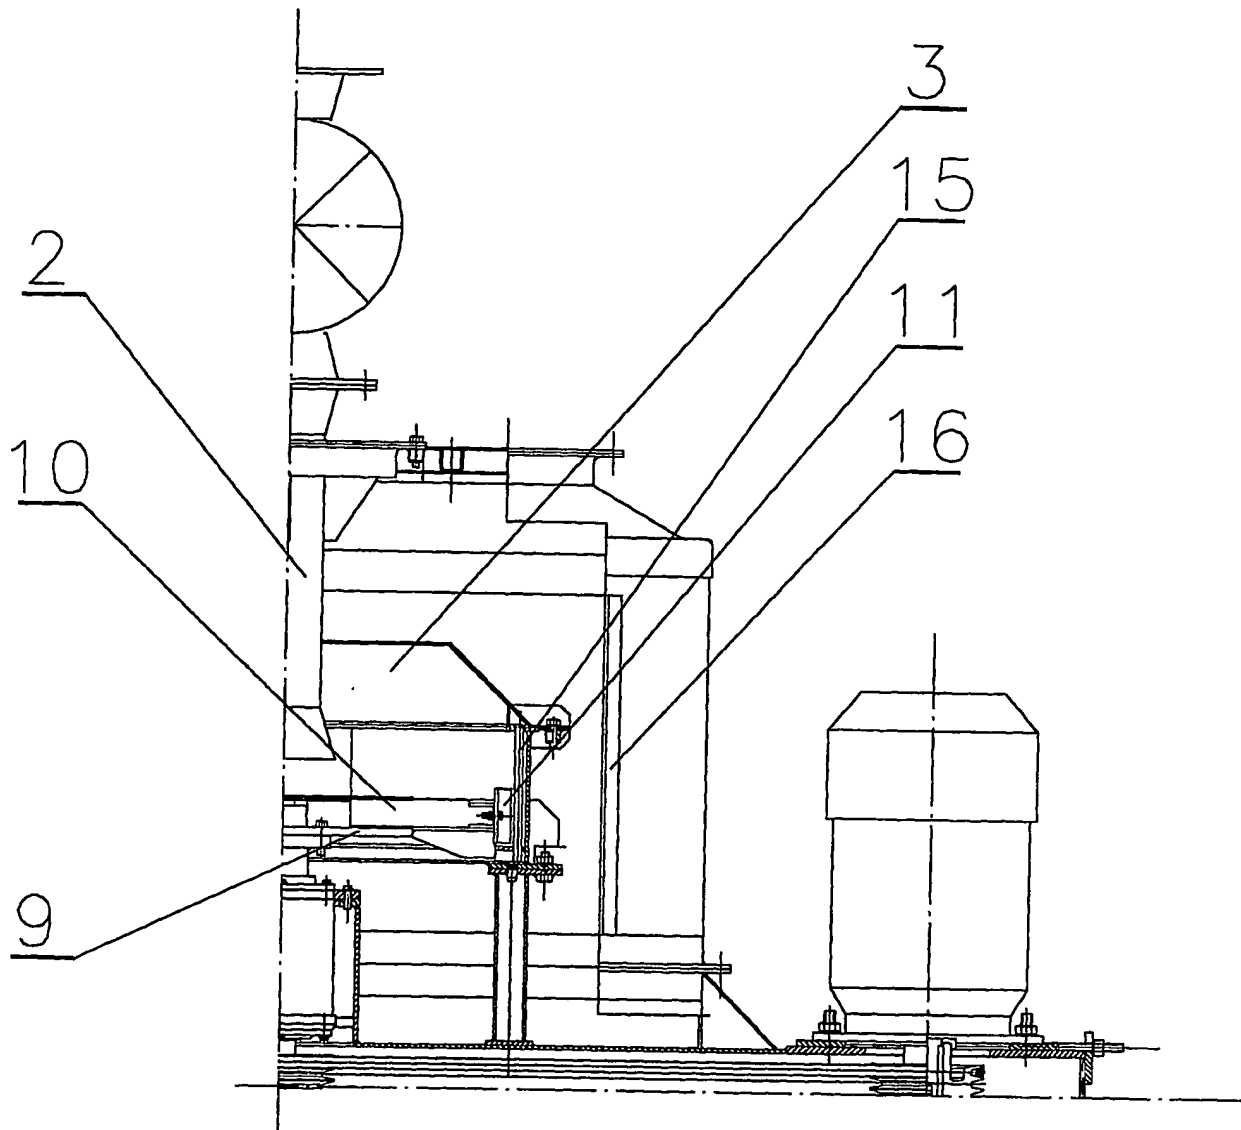


Fig. 2

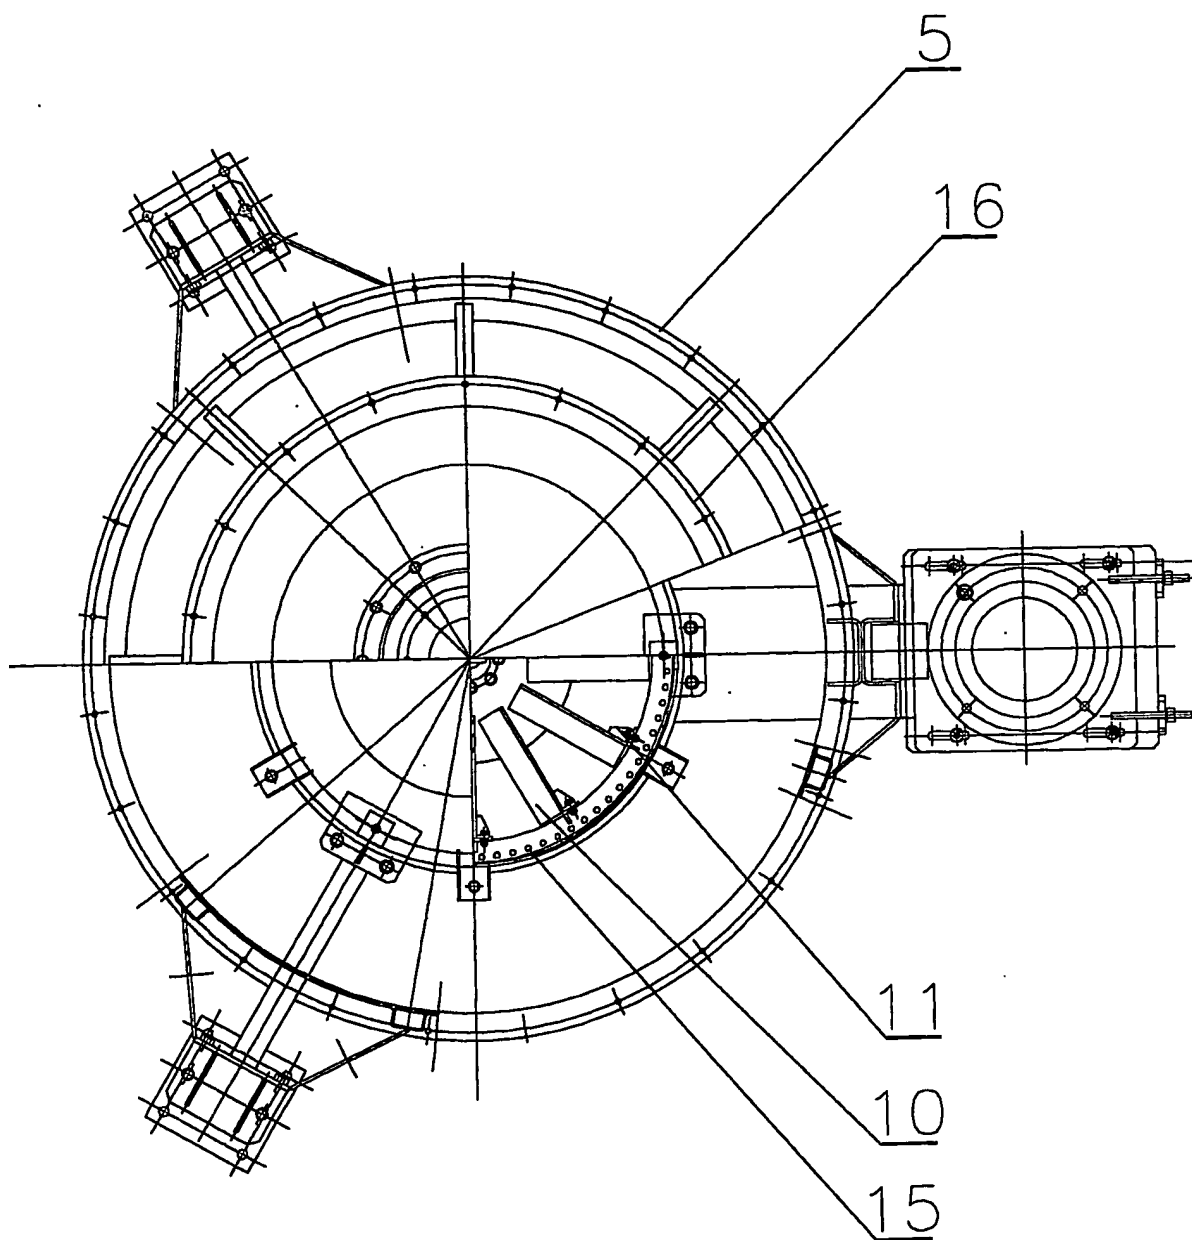


Fig. 3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/PL 03/00115

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01J20/30 B02C17/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J B02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PL 345 913 A (ENERGOMAR-NORD) 26 August 2002 (2002-08-26) cited in the application claims; examples ---	1-3
X	PL 180 380 B (ENERGOMAR-NORD) 31 January 2001 (2001-01-31) cited in the application claims; figures ---	2,3
A	L.J. MUZIO; G.R. OFFEN: "Dry sorbent emission control technologies" CONTROL TECHNOLOGY, vol. 37, no. 5, May 1987 (1987-05), pages 642-654, XP009027977 Paragraphs "Particle size", "Combined technologies" --- -/-	1-3

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 March 2004

Date of mailing of the international search report

29/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schwallier, J-M



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/PL 03/00115

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 1 037 665 A (UNILEVER LTD) 3 August 1966 (1966-08-03) figures	4
A	US 613 718 A (JULIO HARTFORD RAE) 8 November 1898 (1898-11-08) figures	4

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/PL 03/00115

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
PL 345913	A	NONE	
PL 180380	B	04-08-1997 PL 312538 A1	04-08-1997
GB 1037665	A	03-08-1966 DK 115466 B	13-10-1969
		FI 43306 B	30-11-1970
US 613718	A	NONE	